




## ALGO 8180 G2 Configuration Example

Algo 8180 G2 is a good example of a manually configured SIP device useful as a loud ringer or external paging device (loud speaker).

1. Create a manual configured extension for use as a ringer, and as a paging extension. Two different extensions and uses.
2. Access the Algo's web interface using HTTPS and the device IP address. Find the IP address on your DHCP server and/or follow the Algo instructions.
3. Use the IP address of the Hello Hub as your SIP Server for both accounts.
4. Use the extension # as the login ID, and copy the password from the Hello Hub Extension Page.
5. Click 'Save' and test from other phones.

### ring-u portal screen example

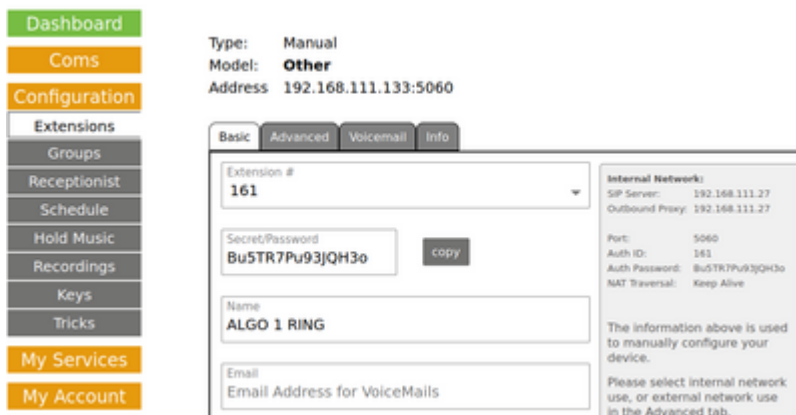

The screenshot shows the configuration page for a manual extension. On the left is a navigation menu with items: Dashboard, Coms, Configuration, Extensions, Groups, Receptionist, Schedule, Hold Music, Recordings, Keys, Tricks, My Services, and My Account. The main content area shows the following details:

- Type: Manual
- Model: Other
- Address: 192.168.111.133:5060

Below this are tabs for Basic, Advanced, Voicemail, and Info. The Basic tab is active, showing:


- Extension #: 161
- Secret/Password: Bu5TR7Pu93jQH3o (with a copy button)
- Name: ALGO 1 RING
- Email: Email Address for VoiceMails

On the right, the Internal Network settings are displayed:

- SIP Server: 192.168.111.27
- Outbound Proxy: 192.168.111.27
- Port: 5060
- Auth ID: 161
- Auth Password: Bu5TR7Pu93jQH3o
- NAT Traversal: Keep Alive

A note at the bottom states: "The information above is used to manually configure your device. Please select internal network use, or external network use in the Advanced tab."

### Matching ALGO 8180 G2 config screen example

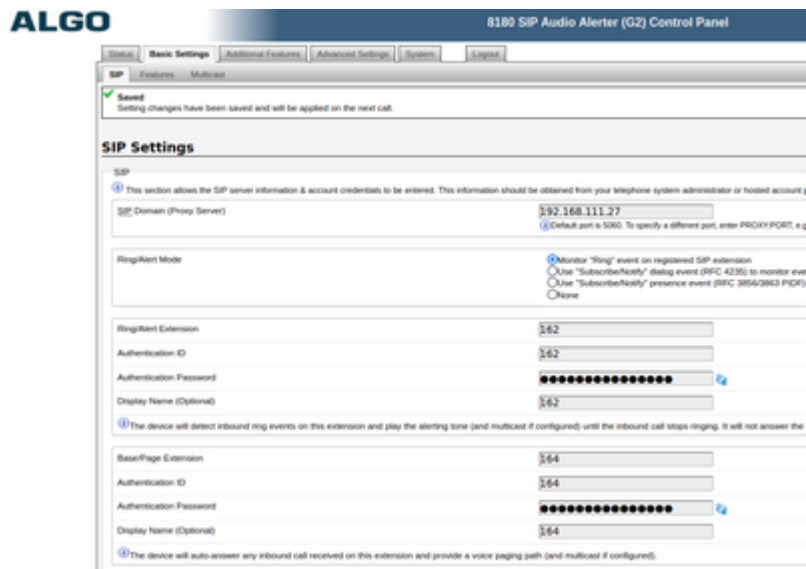

## If a Hosted Hello Hub

Advanced Settings tab:

- Register/Subscribe Period(seconds): 120
- KeepAlive Method: Double CRLF
- KeepAlive Period(seconds): 10
- Server Redundancy: Disabled

This is overly aggressive, but should keep your firewall from timing out on these sessions. Our Hosted Hello Hub's have a long default timeout (hours), but good firewalls track UDP connections and drop them pretty quickly. We typically set automatically configured deskphones to 120 to 300 seconds for the same reason.

From:  
<https://wiki.ring-u.com/wiki/> - support wiki

Permanent link:  
<https://wiki.ring-u.com/wiki/doku.php?id=manual-config:algo-8180&rev=1675441350>

Last update: 2025/11/02 18:50

