


SNOM PA1+ Manual Config

SNOM PA1+



First, you will need to create a manual extension through the Ring-U portal. You can create a manual extension by clicking: **Configuration**, then **Extensions** and at the bottom of the extensions page click the green **Add Phone** button:

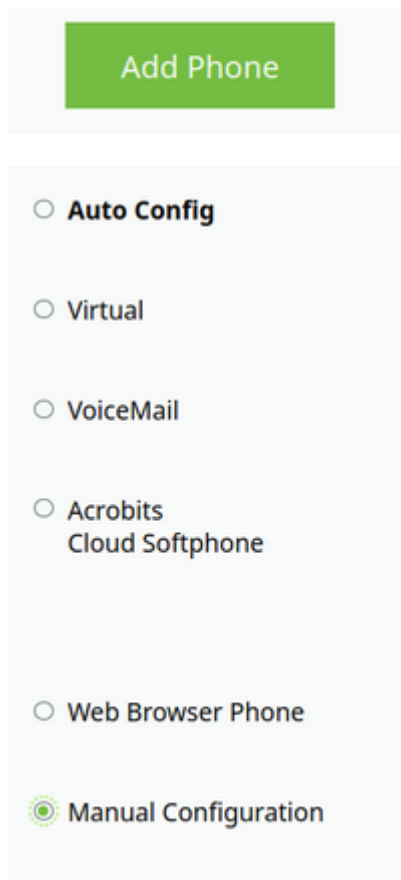

After creating your extension, give it a name and an extension number. You will dial this extension number to initiate a page. The manual extension will automatically generate a password. You will use the extension number and password for **Identity 1** in the next few steps:

Extension	111
Type	Human Config
Model:	Other

Basic	Advanced	Voicemail	Info
-------	----------	-----------	------

Extension #	111	<input type="checkbox"/> Intercom Mode as 211
Secret/Password	CKDiQi835u2QZ25	copy
Name	SNOM	
Email	Email Address for VoiceMails	
Time to Ring in Seconds	30 (recommended)	
If No Answer/Unavailable:	Voicemail	

Save/Update	Remove/Delete
-------------	---------------

Account is the extension number for the manual extension you just created:



Click the **NAT** tab and set **Keepalive interval** to 15 and **Number of Initial Keep-Alives on RTP port** to 2.



Click the **Advanced** option on the left side of the screen, pick the **SIP/RTP** tab and page down to the bottom:




Enter a name for the paging group and its multicast address.

Note: The port number at the end of this multicast address corresponds to the group number you are configuring for paging. For example, this group is 502, so the port number is 2502, group 507 would be 2507. You can copy the full address directly by navigating in the portal to the group you are configuring


and it will be listed in the top right where paging is enabled. See below:



Click **Identity 1** again on the left side of the screen, then click the **SIP/RTP** tab. Add the multicast address and port to the **Multicast relay address** box:

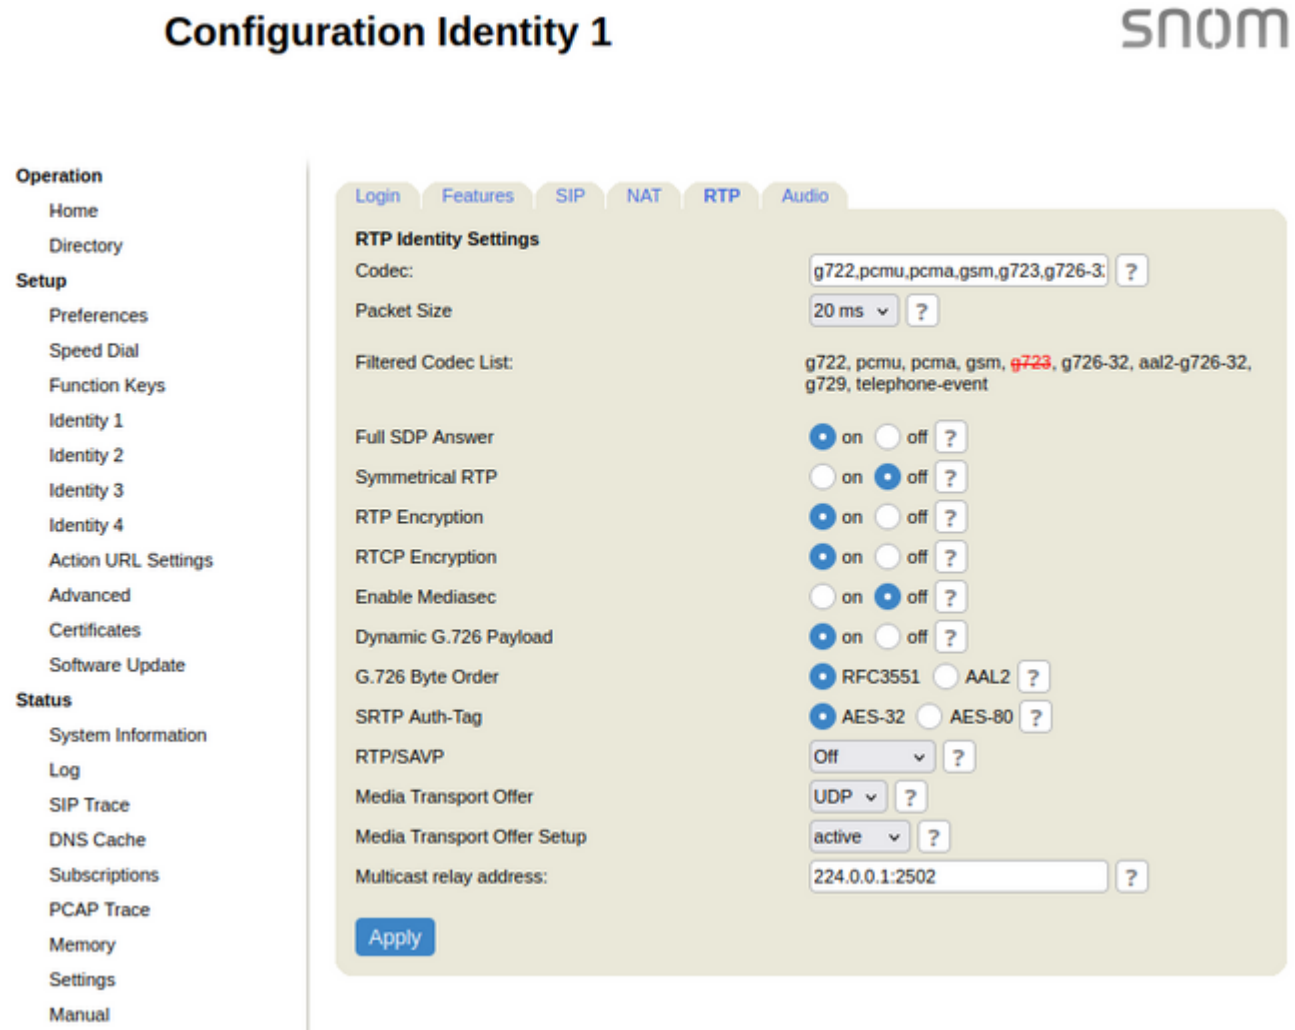

Click apply and the paging group should be ready to use by dialing the extension number. To configure another group, repeat this process with another manual extension and use Identity 2 through 4 to configure it.



From:
<https://wiki.ring-u.com/wiki/> - **support wiki**

Permanent link:
<https://wiki.ring-u.com/wiki/doku.php?id=manual-config:snom-papulus&rev=1739559857>

Last update: **2025/02/14 19:04**

