

## Groups

Groups allow you to have multiple phones ring at the same time for an incoming call. You create a group, select extensions you want for that group, and then they can be used by a receptionist or by an internal person, “call down to billing at 503!”

Typical uses are a group of phones for Receptionists, Sales, Support, Accounting...

## Groups


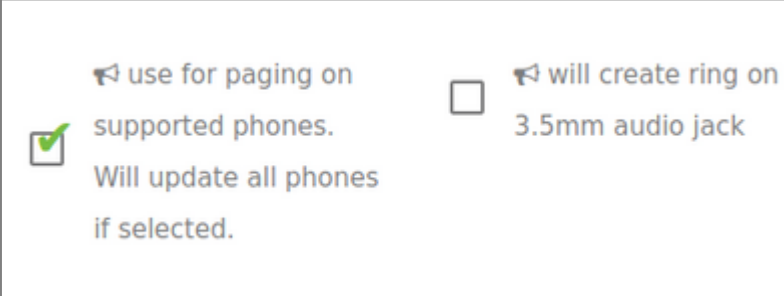
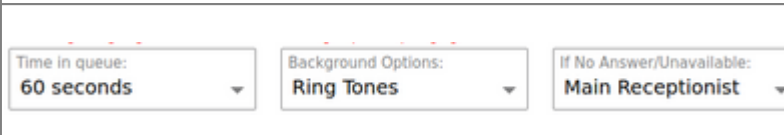
500 All

## 501 Customer Service

502 Sales

### 503 Shop Floor

All ring-u systems include the default group **500**, which includes all real extensions.

<p>To create more groupings, go to Configuration &gt; Groups and chose the button <b>Add Group</b>. Give it a name and select the phones you want to have in that group.</p>	
<p>There are options that make that a group used for paging, turning those phones into a PA system. This is available for the first three groups, for on premise Hello hubs. This option does not work for cloud hosted systems or external phones.</p>	
<p>You can also define what a caller hears, ringing or your hold music/message, how long they ring those phones and what happens if no one answers.</p>	

**A note on ringtimes** - as a rule, we recommend ring times of 20 seconds or more. Ring times of 15 seconds are technically possible, but may simply be too short of a time for some users. If you must use a 15 second ring, make sure your voicemail is configured.

From: <https://wiki.ring-u.com/wiki/> - **support wiki**

Permanent link:  
<https://wiki.ring-u.com/wiki/doku.php?id=ring-groups&rev=1654802158>

Last update: **2022/06/09 19:15**

